

Schottky Barrier Rectifier

SS310A
SMA



Cathode  **Anode** 

Features

- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead Free Finish, RoHS Compliant

Applications

- DC/DC Converters
- AC/DC Adaptors
- Switching Power Supplies
- Freewheeling Diodes

Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)


Parameter			Symbol	Limit		Unit
Maximum repetitive peak reverse voltage			VRRM	100		V
Maximum average forward rectified current			IF(AV)	3		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load			IFSM	80		A
Operating junction and storage temperature range			TJ, TSTG	-55 to +150		°C
Typical thermal resistance			RθJA	150		°C/W
Instantaneous forward voltage			VF(1)	TYP.	MAX.	V
	IF=3A	TJ=25°C		0.78	0.85	
	IF=3A	TJ=125°C		0.70	-	
Instantaneous reverse current at rated reverse voltage		TJ=25°C	IR(2)	10	100	μA
		TJ=125°C		10	-	mA

Notes:


(1) Pulse test: 300 μs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width ≤ 40 ms


RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

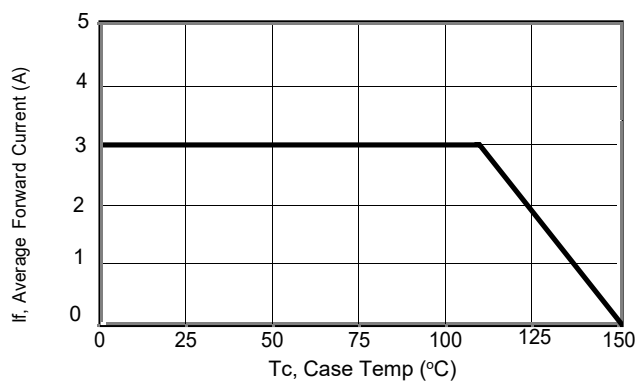


Current Derating, Case

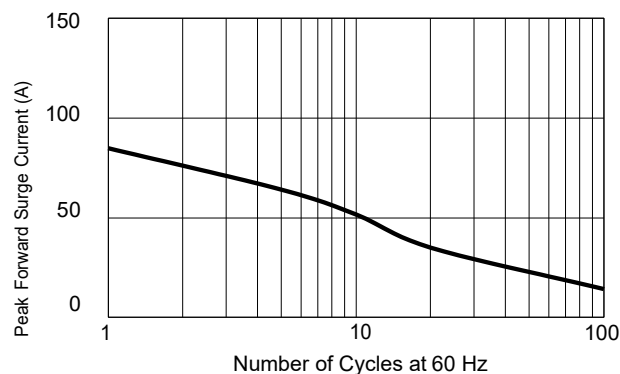


Maximum Repetitive Surge Current

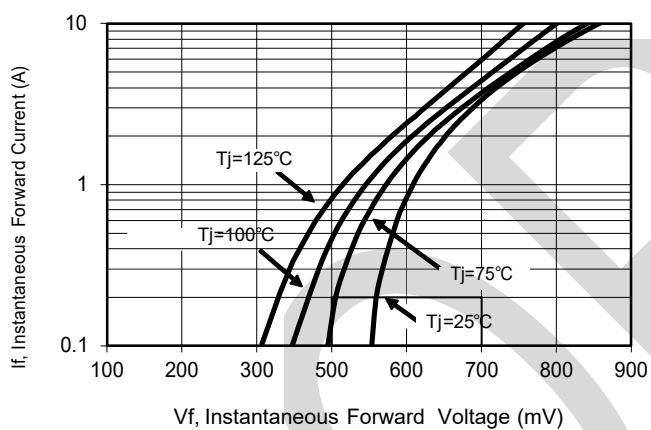

Typical Forward Voltage

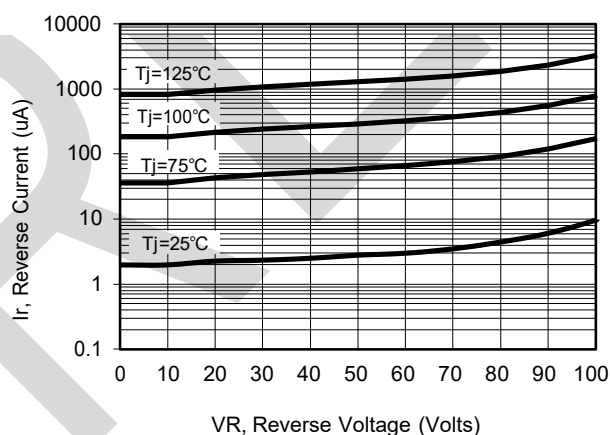


Typical Reverse Current

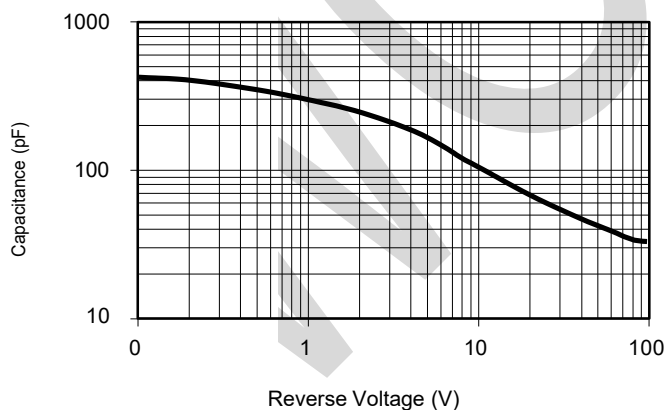

Typical Junction Capacitance

PACKAGE OUTLINE DIMENSIONS

SMA

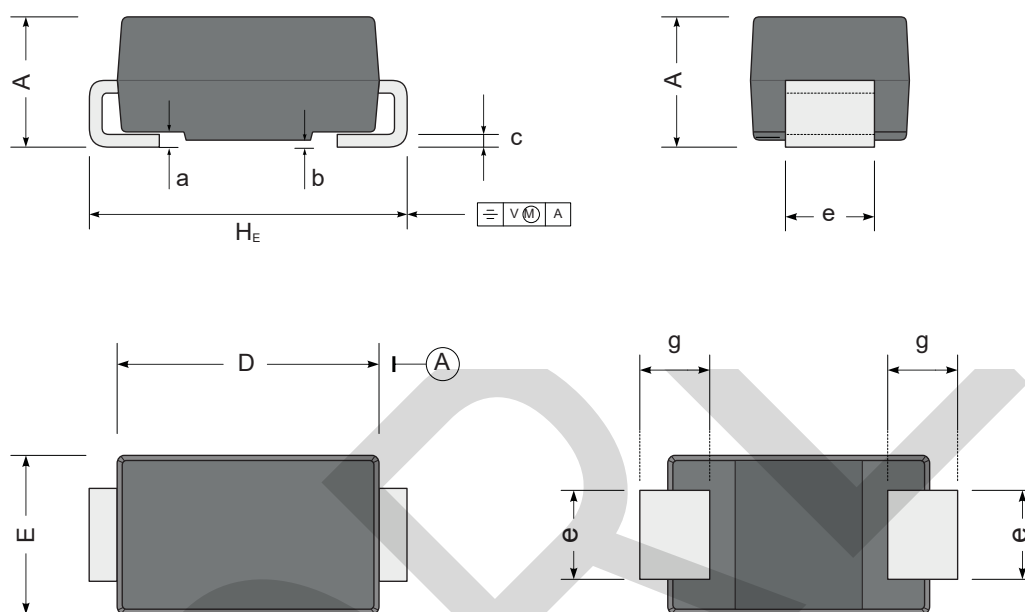


UNIT		A	D	E	H_E	c	e	g	b	a
mm	max	2.2	4.5	2.7	5.2	0.31	1.6	1.5	0.2	0.3
	min	1.9	4.0	2.3	4.7	0.15	1.3	0.9	0.05	
mil	max	87	181	106	205	12	63	59	7.9	12
	min	75	157	91	185	6	51	35	2	

Marking Information




①Product model : SS310A

②PDC information :

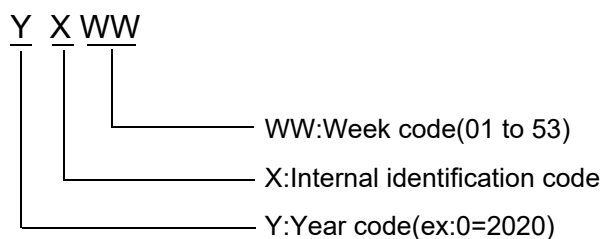


Packaging Information


1.Reel Dimensions



2. Inside Box



3. Outside Box

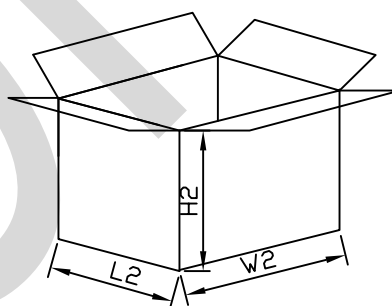

NO	UNIT	Reel Dimensions			Inside Box			Outside Box		
Size	mm	φ	A	B	L1	W1	H1	L2	W2	H2
		330	330	15	340	340	40	360	360	360
QTY	PCS	Smallest package,5.000PCS/reel			10.000PCS,2 reel in total			80,000PCS/carton,8boxes in total		
Note	Tolerance ≤20mm,±3mm; 21-100mm,±5mm; 101-500mm,±10mm									